

# User Documentation

Inserting a SIM Card into a Logger

## The Inserting a SIM Card into a Rebel Logger

If equipped with the GPRS option you can insert a standard size SIM card into the Logger in order to facilitate using it with StreamLog, although the exact position of the SIM card varies between different Loggers in principle the method of installing the SIM Card is the same:

### Step 1


Undo the TORX bolts (normally at the end opposite the USB and SD Card of the Logger).

### Step 2

Very carefully slide the housing away from the front panel making sure to note which slots the PCBs are in.

### Step 3

Locate the SIM Card Slot.

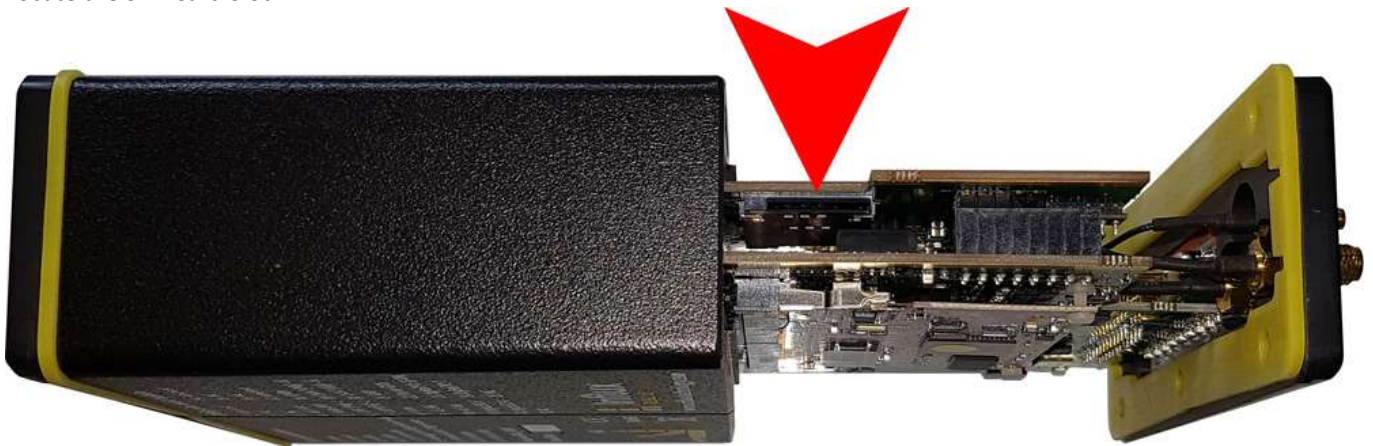

### Step 4

Insert the Standard Size SIM Card into the slot and push it in making sure that the contacts of the SIM Card face the PCB that the slot is soldered onto, and making sure that the cut off corner of the SIM Card goes in first.

### Step 5

Very carefully slide the PCBs back into the housing in the same slots that the PCBs were in, take care not to snag or jam any cables on or between PCBs or the end panels and the housing.

### Step 6

Replace and tighten the TORX bolts again taking great care not to over tighten the bolts and strip the tread in the housing.